



## Angle-Adjustable LED Strips



### Features:

- LED: SMD3528, SMD3535, SMD5630
- Constant Current and Constant Voltage Version
- LED Qty: 70LED/m
- Power: 15W/m, 14.4W/m, 7.2W/m, 4.8W/m
- Voltage: DC24V
- Color: Warm White, Nature White, Pure White, RGB, Red, Green, Blue, Yellow
- Waterproof: IP20 Non-waterproof
- Cutting: 7LED cutting for DC24V version

### Dimension Drawings:




SMD5630 CC Strips Unit:mm

Model No.	LED Type	LED Qty	Power (W/m)	Voltage	CC/CV	CRI(Ra)	PCB Width (mm)	Water-proof	Color	λ (Nm)/(CT:K)	Lumen (lm/m)
QL-F5630A35SA-W-24C-AG	SMD5630	70	15W	24V	CC Version	≥95 ≥90	5+8mm	IP20	□ WarmWhite	2700/3000K	1350-1400
□ NatureWhite									4000-4500K	1450-1500	
□ Pure White									6000-6500K	1500-1600	
QL-F3535A35-C-24-AG	SMD3535	70	14.4W	24V	CV Version	/	5+8mm	IP20	RGB	/	600-700
QL-F3528A35SA-W-24-AG	SMD3528	70	7.2W	24V	CV Version	≥95 ≥90	5+8mm	IP20	□ WarmWhite	2700/3000/3500K	650-700
□ NatureWhite									4000-4500K	700-750	
□ Pure White									5000/6000K	750-800	
■ Red									620-630	150-170	
■ Yellow									585-595	150-170	
QL-F3528A35-R-24-AG	SMD3528	70	4.8W	24V	CV Version	/	5+8mm	IP20	■ Blue	455-470	110-130
■ Green									510-525	350-380	
QL-F3528A35-Y-24-AG											
QL-F3528A35-B-24-AG											
QL-F3528A35-G-24-AG											

Remark: CC means Constant Current version, CV means Constant Voltage version.


## S-Type CRI≥95/90 Bendable LED Strips

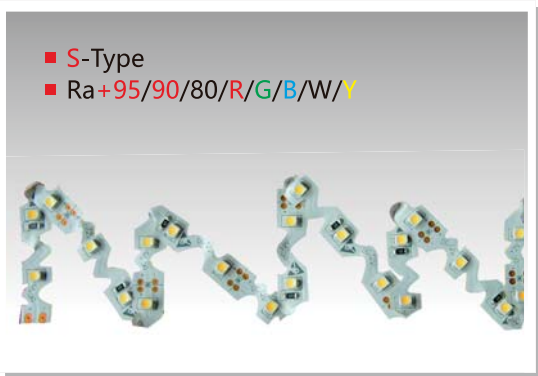

### Features:

- SMD3528
- Constant Voltage Version
- LED Qty: 60LED/m
- Power: 4.8W/m, 7.2W/m
- Voltage: DC12V/DC24V
- Color: Red, Green, Blue, Yellow, Warm White, Nature White, Pure White
- Waterproof: IP20 non-waterproof version
- Cutting: 6LED cutting for DC24V version, 3 LED cutting for DC12V version

### Dimension Drawings:

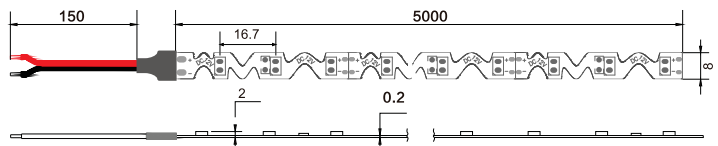

60LED/m Strips Unit:mm

Model No.	LED Type	CC/CV	LED Qty	Power (W/m)	Voltage	CRI(Ra)	PCB Width	Water-proof	Color	(CT:K)	Lumen(lm/m)
QL-F3528A30SA-W-12/24-BD	SMD3528	CV Version	60	7.2W	12V/24V	≥95 ≥90	8mm	IP20	□ WarmWhite	2700/3000/3500K	550-600
□ NatureWhite									4000-4500K	600-650	
□ Pure White									5000/6000K	650-700	
QL-F3528A30-R-12/24-BD	SMD3528	CV Version	60	4.8W	12V/24V	/	8mm	IP20	■ Red	620-630	140-150
■ Yellow									585-595	140-150	
■ Green									455-470	300-330	
■ Blue									510-525	100-110	
QL-F3528A30-B-12/24-BD											
QL-F3528A30-G-12/24-BD											