


Infrared LED Strips



Features:

- LED: SMD3528
- Constant voltage version
- LED Qty: 60LED/m, 120LED/m
- Power: 4.8W/m, 9.6W/m
- Voltage: DC12V, DC24V
- Color: Infrared 840-845nm
- Waterproof: IP20, IP67
- Cutting: 6 LED for DC24V version, and 3LED for DC12V version

Dimension Drawings:

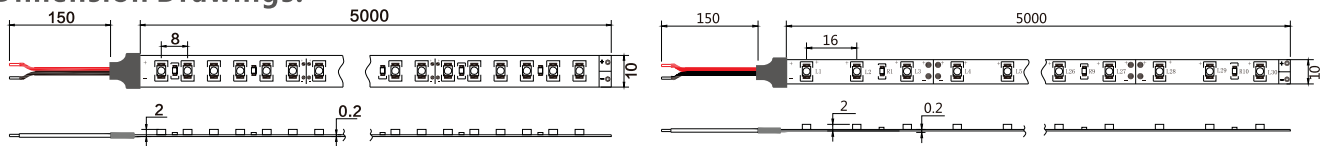

120LED/m CV Strips Unit:mm

60LED/m CV Strips Unit:mm

Model No.	LED Type	CC/CV	LED Qty	Power (W/m)	Voltage	PCB Width	Waterproof	Color	λ (Nm)/(CT:K)
QL-F3528A30-IR-12/24	SMD3528	CV Version	60LED/m	4.8W	12V/24V	10mm	IP20	Infrared Color	840-845nm
QL-F3528C30-IR-12/24							IP67		
QL-F3528A60-IR-12/24	SMD3528	CV Version	120LED/m	9.6W	12V/24V	10mm	IP20	Infrared Color	840-845nm
QL-F3528C60-IR-12/24							IP67		


Fresh Food Lighting LED Strips



Features:

- LED: SMD5050
- Constant Voltage Version
- LED Qty: 60LED/m, 30LED/m
- Power: 14.4W/m, 7.2W/m
- Voltage: DC12V, DC24V
- Color: Warm White+Pure White+Red
- Waterproof: IP20, IP67
- Cutting: 6LED cutting for DC24V version, and 3 LED cutting for DC12V version

Dimension Drawings:

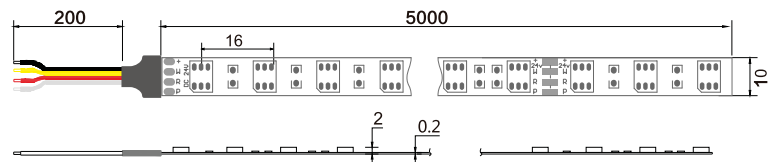

60LED/m CV Strips

Unit:mm

Model No.	LED Type	CC/CV	LED Qty	Voltage	Water-proof	Power (W/m)	PCB Width	Color	λ (Nm)/(CT:K)	Lumen (lm/m)
QL-F5050X30-F-12/24	SMD5050	CV Version	60	12V/24V	IP20/IP67	14.4W	10mm	WW+PW+Red	6000K, 2700K, 620-630	900-1000

Remark: X stands for waterproof version, A stands for IP20 version, C stands for IP67 version